


# MOTION POSTER

## 49-B2B

### Product Information

<p><b>Product information</b></p> <p>Product name Product group Description</p> <p>Alignment</p>	<p>Motion Poster 49-B2B Digital Signage 49" 3000nit with current-carrying, insulated cable suspension (TÜV tested according to DIN EN 60335-1; 2020-08 Pkt.21 mechanical strength) Portrait</p>	 <p>Front view</p>
<p><b>Display, 2x identical</b></p> <p>Panel technology Usable screen area (WxH) Screen diagonal Brightness Contrast ratio Viewing angle H/V Colour depth Response time (G to G) Pixel Pitch MTBF</p>	<p>a-SI TFT active Matrix 604x1073,8 mm 48,5 inch 3.000 cd/m<sup>2</sup> 1.300:1 178/178 ° 8 bit 8 ms 0,63 x 0,63 mm 30.000 h</p>	
<p><b>Mechanical</b></p> <p>Dimensions (WxHxD) Weight without power supply unit Weight with packaging Frame width (Bezel)</p> <p>IP protection class (front/back)</p>	<p>661 x 1136 x 99 mm 37 kg 40 kg circumferential 28.5 - NB side circumferential 27 - HB side IP22</p>	<p><b>Display NB</b> Brightness: 700 cd/m<sup>2</sup> Contrast ratio: 1.000:1</p> <p><b>Display NB</b> Brightness: 3000 cd/m<sup>2</sup> Contrast ratio: 1:300:1</p>
<p><b>Available accessories</b></p> <p>Accessories 1 Accessories 2</p>	<p>Power supply unit, cold appliance connection cable C13 Duplex cable clamps and cable thimbles</p>	
<p><b>Computer, 2x identical:</b></p> <p>Operating system CPU GPM RAM SSD</p>	<p>Linux (customer) Intel Atom x5-Z8350, Quadcore@1850MHz Adreno 306 GPU DDR3L-RS 1600; 4GB 32 GB EMMC</p>	



## MOTION POSTER 49-B2B

### Synchronisation rate, 2x identical

Horizontal frequency	67,5 Hz
Frame rate	60 Hz

### Resolution, 2x identical

Native resolution	1080 x 1920 Pixel
-------------------	-------------------

### Connectivity, 2x identical

Video inputs (internal)	-
Video inputs (external)	-
Interfaces (external)	USB, WLAN
Interfaces (internal)	-

### Sensors


Brightness sensor	yes
Temperature sensor	yes, internal

### Electrical

typ. Power consumption	220 W
max. power consumption	347 W
Power data external power supply unit	24 V/14,6 A/350 W

### Operating conditions

Operating time	24/7 hours/day
Ambient temp. during operation	35 °C
Operating humidity	80%

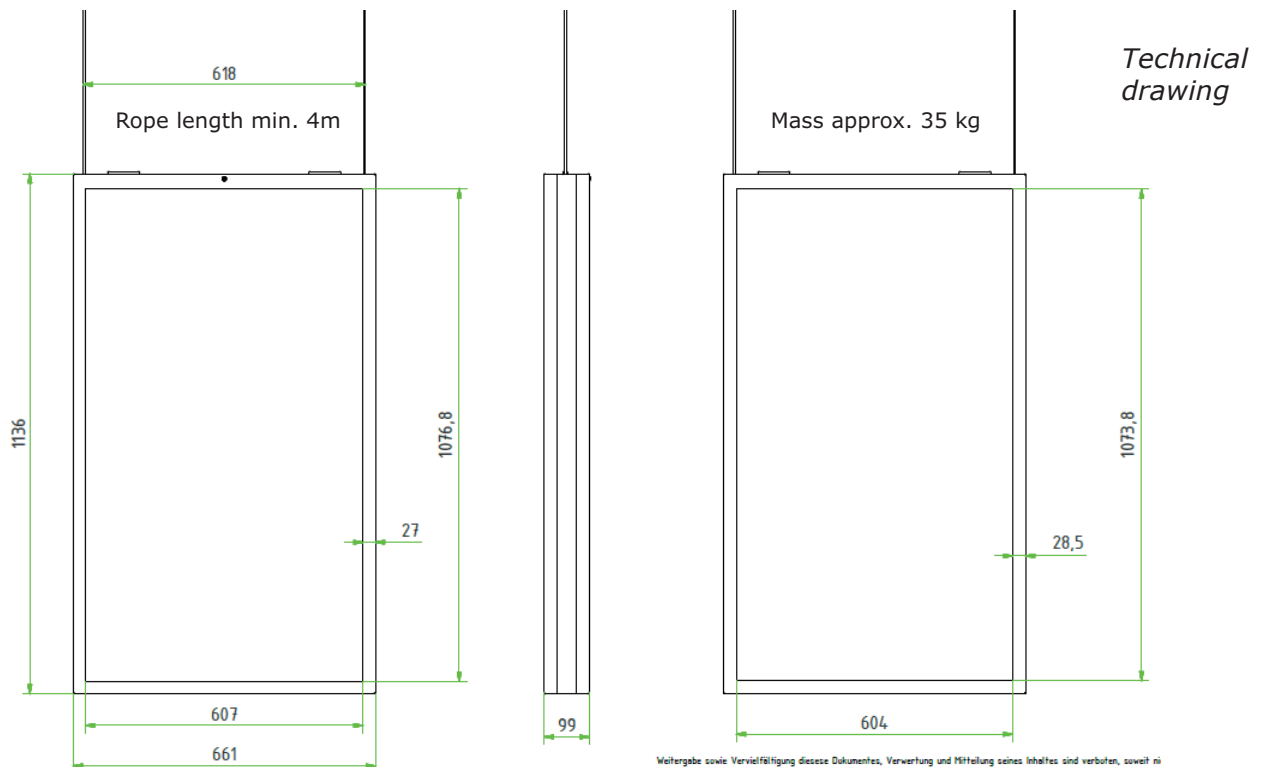

Weitergabe sowie Vervielfältigung dieses Dokumentes, Verwertung und Mitteilung seines Inhaltes sind verboten, soweit es  
Zwischenhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmacher- oder Geschmacks-