

MOTION POSTER

49-HB

Product Information

<p>Product name Product group Description</p>	<p>Motion Poster 49-HB Digital Signage 49" 3000nit with current-carrying, insulated cable suspension (TÜV tested according to DIN EN 60335-1; 2020-08 Pkt.21 mechanical strength) Portrait</p>
<p>Alignment</p>	<p>Portrait</p>
<p>Display Panel technology Usable screen area (WxH) Screen diagonal Brightness Contrast ratio Viewing angle H/V Colour depth Response time (G to G) Pixel Pitch MTBF</p>	<p>a-SI TFT active Matrix 604x1073,8 mm 48,5 inch 3.000 cd/m² 1.300:1 178/178 ° 8 bit 8 ms 0,63 x 0,63 mm 30.000 h</p>
<p>Mechanical Dimensions (WxHxD) Weight without power supply unit Weight with packaging Frame width (Bezel) IP protection class (front/back)</p>	<p>661 x 1136,1 x 67,5 27 kg 30 kg 27,1mm/32,3mm (oben) IP22</p>
<p>Available accessories Accessories 1 Accessories 2</p>	<p>Netzteil, Kaltgeräteanschlusskabel C13 Duplex Seilklemmen und Seilkauschen</p>
<p>Computer Operating system CPU GPM RAM SSD</p>	<p>Linux (Kunde) Intel Atom x5-Z8350, Quadcore@1850MHz Adreno 306 GPU DDR3L-RS 1600; 4GB 32 GB EMMC</p>



MOTION POSTER 49-HB

Synchronisation rate

Horizontal frequency	67,5 Hz
Frame rate	60 Hz

Resolution

Native resolution	1080 x 1920 Pixel
-------------------	-------------------

Connectivity

Video inputs (internal)	-
Video inputs (external)	-
Interfaces (external)	USB, WLAN
Interfaces (internal)	-

Sensors

Brightness sensor	yes
Temperature sensor	yes, internal

Electrical


typ. Power consumption	200 W
max. power consumption	250 W
Power data external power supply unit	24 V/14,6 A/350 W

Operating conditions

Operating time	24/7 hours/day
Ambient temp. during operation	35 °C
Operating humidity	80%



Rear view

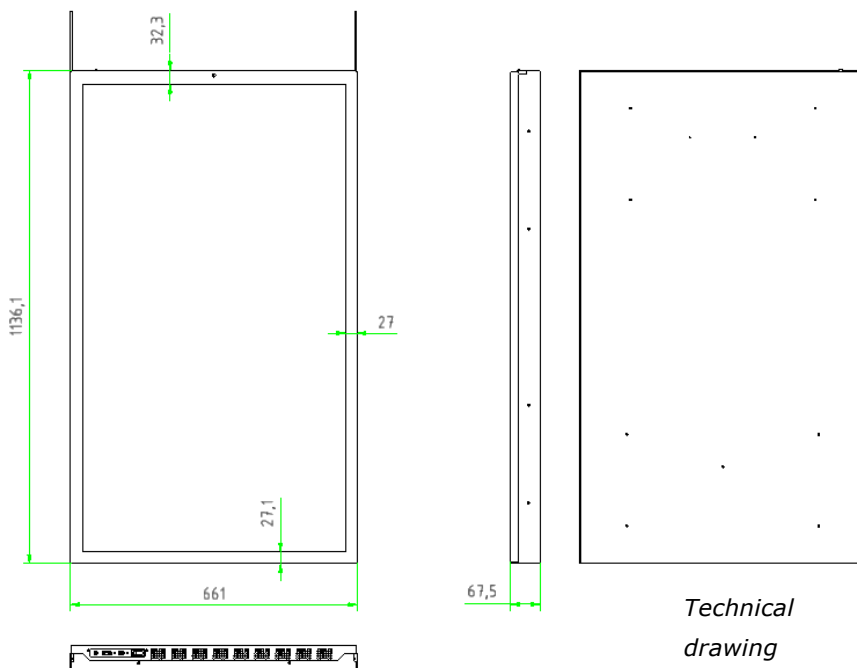

Technical drawing



Rope suspension