

MOTION POSTER

49-NB

Product Information

<p>Product name Product group Description</p> <p>Alignment</p>	<p>Motion Poster 49-NB Digital Signage 49" 700nit with current-carrying, insulated cable suspension (TÜV tested according to DIN EN 60335-1; 2020-08 Pkt.21 mechanical strength) Portrait, Landscape possible</p>
<p>Display Panel technology Usable screen area (WxH) Screen diagonal Brightness Contrast ratio Viewing angle H/V Colour depth Response time (G to G) Pixel Pitch MTBF</p>	<p>a-SI TFT active Matrix 604x1073,8 mm 48,5 inch 700 cd/m² 1.000:1 178/178 ° 8 bit 8 ms 0,63 x 0,63 mm 30.000 h</p>
<p>Mechanical Dimensions (WxHxD) Weight without power supply unit Weight with packaging Frame width (Bezel) VESA mountings IP protection class (front/back)</p>	<p>approx. 661 x 1130 x 35 mm approx. 25 kg approx. 27 kg approx. 27 mm circumferential - IP22</p>
<p>Available accessories Accessories 1 Accessories 2</p>	<p>Power supply unit, cold appliance connection cable C13 Duplex cable clamps and cable thimbles</p>
<p>Computer Operating system CPU GPM RAM SSD</p>	<p>Linux (customer) Intel Atom x5-Z8350, Quadcore@1850MHz Adreno 306 GPU DDR3L-RS 1600; 4GB 32 GB EMMC</p>




MOTION POSTER 49-NB

Synchronisation rate Horizontal frequency Frame rate	67,5 Hz 60 Hz
Resolution Native resolution	1080 x 1920 Pixel
Connectivity Video inputs (internal) Video inputs (external) Interfaces (external) Interfaces (internal)	- - USB, WLAN -
Sensors Brightness sensor Temperature sensor	no yes, internal
Electrical typ. Power consumption max. power consumption Power data external power supply unit	122 W 150 W 24 V/6,6 A/260 W
Operating conditions Operating time Ambient temp. during operation Operating humidity	24/7 hours/day 35 °C 80%



Rear view

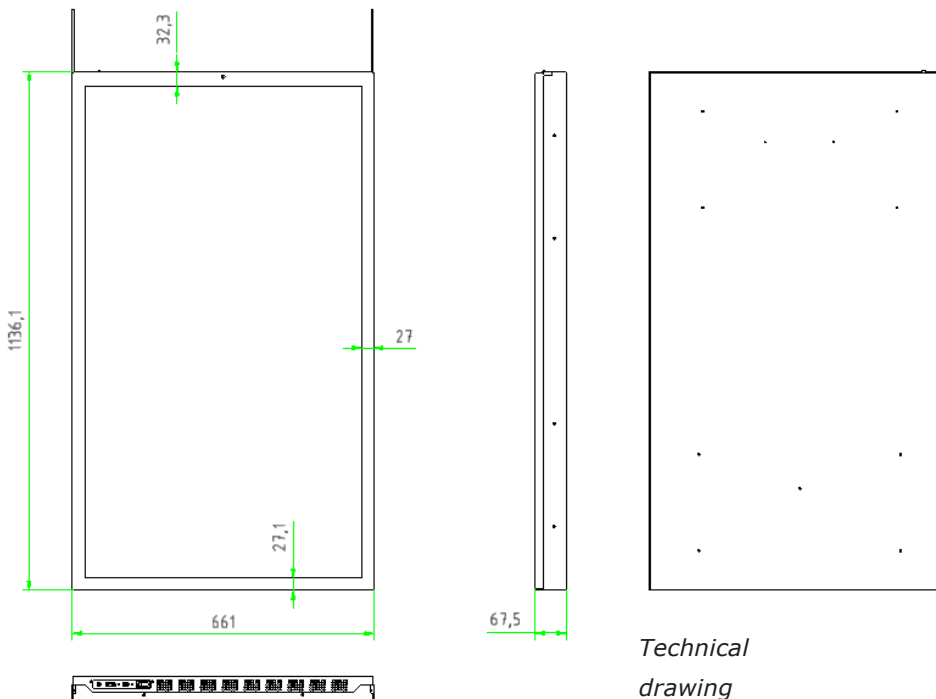

Technical drawing



Rope suspension