

MOTION POSTER

55-P-L VERSION 2

Product Information

Product name Product group Description	Motion Poster 55-2NB Digital Signage 55" 2x 700nit with current-carrying, insulated cable suspension (TÜV tested according to DIN EN 60335-1; 2020-08 Pkt.21 mechanical strength)
Alignment	Portrait
Display Panel technology Usable screen area (WxH) Screen diagonal Brightness Contrast ratio Viewing angle H/V Colour depth Response time (G to G) Pixel Pitch MTBF	a-SI TFT active Matrix 680.4 x 1209.6 mm 54.6 inch 700 cd/m ² 5.500:1 178/178 ° 8 bit 8 ms 0.63 x 0.63 mm 30.000 h
Mechanical Dimensions (WxHxD) Weight without power supply unit Weight with packaging Frame width (Bezel) VESA mountings IP protection class (front/back)	708.6 x 1238 x 67.4 mm - „front frame” 33 kg 35 kg circumferential 14.1 mm - „front frame” circumferential 15 mm - „design frame” - IP22
Available accessories Accessories 1 Accessories 2 Computer Operating system CPU GPM RAM SSD	Power supply unit, cold appliance connection cable C13 Duplex cable clamps and cable thimbles Linux (customer) Intel Atom x5-Z8350, Quadcore@1850MHz Adreno 306 GPU DDR3L-RS 1600; 4GB 32 GB EMMC




Front view

MOTION POSTER 55-2NB

Synchronisation rate Horizontal frequency Frame rate	67,5 Hz 60 Hz
Resolution Native resolution	1080 x 1920 Pixel
Connectivity Video inputs (internal) Video inputs (external) Interfaces (external) Interfaces (internal)	- - USB, WLAN -
Sensors Brightness sensor Temperature sensor	no yes, internal
Electrical typ. Power consumption max. power consumption Power data external power supply unit	174 W 200 W 24 V/9 A/220 W
Operating conditions Operating time Ambient temp. during operation Operating humidity	24/7 hours/day 35 °C 80%



Rear view

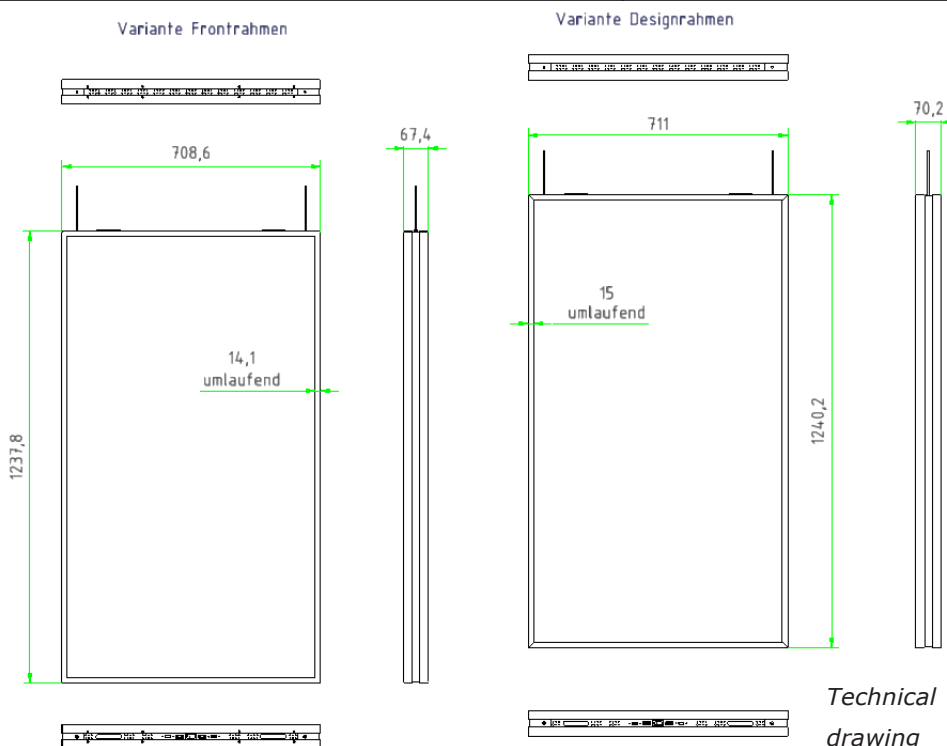

Rope suspension