


MOTION POSTER

55-“HB P-L VERSION 2

Product Information

<p>Product name Product group Description</p> <p>Alignment</p>	<p>Motion Poster 55 „HB-P/L Version 2 Digital Signage 55“ with current-carrying cable suspension Portrait/Landscape</p>
<p>Display Panel technology Usable screen area (WxH) Screen diagonal Brightness Contrast ratio Viewing angle H/V Colour depth Response time (G to G) Pixel Pitch MTBF</p>	<p>a-SI TFT active Matrix with QWP 680.4 x 1209.6 mm 54.6 inch 3000 cd/m² 1.200:1 178/178 ° 8 bit 8 ms 0.63 x 0.63 mm 50.000 h</p>
<p>Mechanical Dimensions (WxHxD) Weight without power supply unit Weight with packaging Frame width (Bezel) VESA mountings IP protection class (front/back)</p>	<p>737,5 x 1266,7 x 67 mm approx. 33 kg approx. 38 kg 27,3 mm - IP22</p>
<p>Available accessories Accessories 1 Accessories 2</p>	<p>Power supply unit, cold appliance connection cable C13 Duplex cable clamps and cable thimbles</p>
<p>Computer Operating system CPU GPM RAM SSD</p>	<p>Linux (customer) Intel Atom x5-Z8350, Quadcore@1850MHz Adreno 306 GPU DDR3L-RS 1600; 4GB 32 GB EMMC</p>

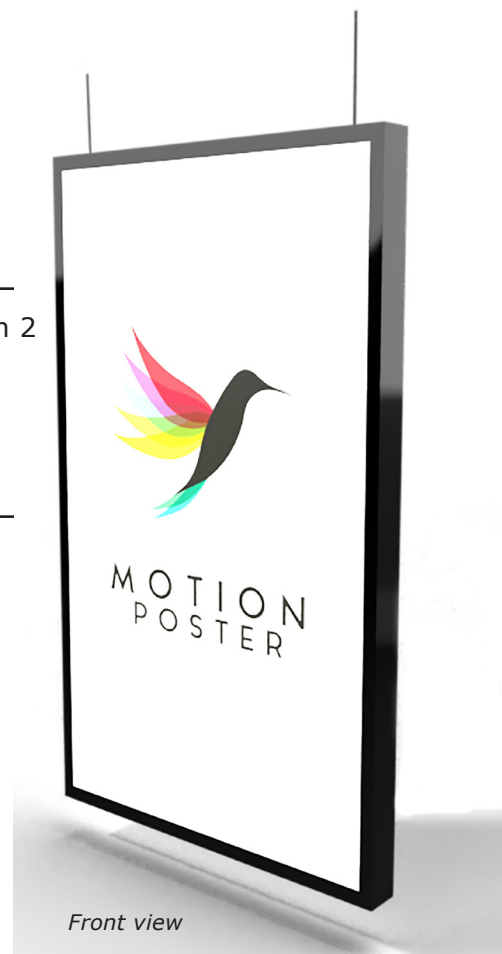

MOTION POSTER 55-“HB P-L VERSION 2

Synchronisation rate Horizontal frequency Frame rate	67,5 Hz 60 Hz
Resolution Native resolution	1080 x 1920 Pixel
Connectivity Video inputs (internal) Video inputs (external) Interfaces (external) Interfaces (internal)	- - 2x USB, W-LAN, Bluetooth, µSD Card -
Sensors Brightness sensor Temperature sensor	yes yes
Electrical typ. Power consumption max. power consumption Power data external power supply unit	approx. 390 W 450 W 24 V/20.8 A/500 W
Operating conditions Operating time Ambient temp. during operation Operating humidity	24/7 hours/day 35 °C 80%



Rear view

Technical drawing

